


15PKW-1616: Manchon Blanc 16x16

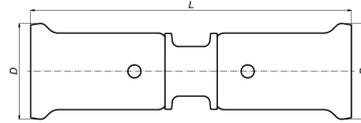

Informations commerciales

PVDF press fittings in combination with multilayer pipe, a completely corrosion-free system. The synthetic press fittings are made from injection moulded PVDF (Polyvinylidene fluoride)*. PVDF offers the user a unique combination of properties:

- Highly resistant to pressure and temperature
- Excellent mechanical strength
- Extreme flexibility: bending up to 10° is possible
- Perfectly suited for drinking water and food
- Highly resistant to chemicals and corrosion
- Embedding is possible without extra protection

Certificats

STF, QB (CSTBat), SINTEF, ATG, ETA, AFNOR, ACS, RISE, DVGW Wasser, Aenor, Sans 21003

Applications

drinkwater, verwarming, perslucht, koeling, demi water

Solutions


gebouwinstallaties, industrie

Caractéristiques techniques

Material connection 1	Polyvinylidene fluoride (PVDF)	Bend radius	0 Millimetre
Material quality connection 1	Polyvinylidene fluoride (PVDF) (expired)	Outer pipe diameter connection 1	16 Millimetre
Surface protection connection 1	Untreated	Wall thickness, connection 1	0,7 Millimetre
Surface treatment connection 1	Untreated	Outer pipe diameter connection 2	16 Millimetre
Material connection 2	Polyvinylidene fluoride (PVDF)	Wall thickness, connection 2	0,7 Millimetre
Material quality connection 2	Polyvinylidene fluoride (PVDF) (expired)	Zeta value	0,7
Surface protection connection 2	Untreated	Length	73,5 Millimetre
Surface treatment connection 2	Untreated	Length of connection 1	37 Millimetre
Shape	Straight	Working length connection 1	10 Millimetre
Reducing	No	Length of connection 2	37 Millimetre
Eccentric	No	Working length connection 2	10 Millimetre
System-specific	Yes	Min. medium temperature (continuous)	-10 Degrees celsius
Nominal diameter connection 1	DN 8	Wrench width union nut	0 Millimetre
Connection 1	Press sleeve	Max. medium temperature (continuous)	70 Degrees celsius
Contour code connection 1	TH	Max. operating pressure at 20 °C	16 Pressure
Nominal diameter connection 2	DN 8	Standard Dimension Ratio (SDR)	0
Connection 2	Press sleeve		
Contour code connection 2	TH		
Contour code	TH		
Material sealing	Ethylene-propylene diene monomer rubber (EPDM)		
Main colour fitting	White		
Self-sealing	No		
Ring stiffness class	Other		
With sealing rings/gaskets	Yes		
With buffer stud	No		
Gastec QA	No		
Capped	No		
With drain	No		
KIWA certified	No		
With de-aerator	No		
FM quality mark	No		
LPCB quality mark	No		
ULC quality mark	No		
VdS quality mark	No		
UL quality mark	No		

Produits liés

15PKW-2020: Manchon Blanc 20x20

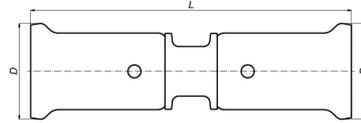

Informations commerciales

PVDF press fittings in combination with multilayer pipe, a completely corrosion-free system. The synthetic press fittings are made from injection moulded PVDF (Polyvinylidene fluoride)*. PVDF offers the user a unique combination of properties:

- Highly resistant to pressure and temperature
- Excellent mechanical strength
- Extreme flexibility: bending up to 10° is possible
- Perfectly suited for drinking water and food
- Highly resistant to chemicals and corrosion
- Embedding is possible without extra protection

Certificats

STF, QB (CSTBat), SINTEF, ATG, ETA, AFNOR, ACS, RISE, DVGW Wasser, Aenor, Sans 21003

Applications

drinkwater, verwarming, perslucht, koeling, demi water

Solutions


gebouwinstallaties, industrie

Caractéristiques techniques

Material connection 1	Polyvinylidene fluoride (PVDF)	Bend radius	0 Millimetre
Material quality connection 1	Polyvinylidene fluoride (PVDF) (expired)	Outer pipe diameter connection 1	20 Millimetre
Surface protection connection 1	Untreated	Wall thickness, connection 1	0,7 Millimetre
Surface treatment connection 1	Untreated	Outer pipe diameter connection 2	20 Millimetre
Material connection 2	Polyvinylidene fluoride (PVDF)	Wall thickness, connection 2	0,7 Millimetre
Material quality connection 2	Polyvinylidene fluoride (PVDF) (expired)	Zeta value	0,6
Surface protection connection 2	Untreated	Length	75,5 Millimetre
Surface treatment connection 2	Untreated	Length of connection 1	38 Millimetre
Shape	Straight	Working length connection 1	11 Millimetre
Reducing	No	Length of connection 2	38 Millimetre
Eccentric	No	Working length connection 2	11 Millimetre
System-specific	Yes	Min. medium temperature (continuous)	-10 Degrees celsius
Nominal diameter connection 1	DN 10	Wrench width union nut	0 Millimetre
Connection 1	Press sleeve	Max. medium temperature (continuous)	70 Degrees celsius
Contour code connection 1	TH	Max. operating pressure at 20 °C	16 Pressure
Nominal diameter connection 2	DN 10	Standard Dimension Ratio (SDR)	0
Connection 2	Press sleeve		
Contour code connection 2	TH		
Contour code	TH		
Material sealing	Ethylene-propylene diene monomer rubber (EPDM)		
Main colour fitting	White		
Self-sealing	No		
Ring stiffness class	Other		
With sealing rings/gaskets	Yes		
With buffer stud	No		
Gastec QA	No		
Capped	No		
With drain	No		
KIWA certified	No		
With de-aerator	No		
FM quality mark	No		
LPCB quality mark	No		
ULC quality mark	No		
VdS quality mark	No		
UL quality mark	No		

Produits liés

15PKW-2626: Manchon Blanc 26x26

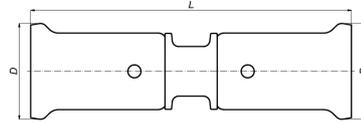

Informations commerciales

PVDF press fittings in combination with multilayer pipe, a completely corrosion-free system. The synthetic press fittings are made from injection moulded PVDF (Polyvinylidene fluoride)*. PVDF offers the user a unique combination of properties:

- Highly resistant to pressure and temperature
- Excellent mechanical strength
- Extreme flexibility: bending up to 10° is possible
- Perfectly suited for drinking water and food
- Highly resistant to chemicals and corrosion
- Embedding is possible without extra protection

Certificats

STF, QB (CSTBat), SINTEF, ATG, ETA, AFNOR, ACS, RISE, DVGW Wasser, Aenor, Sans 21003

Applications

drinkwater, verwarming, perslucht, koeling, demi water

Solutions


gebouwinstallaties, industrie

Caractéristiques techniques

Material connection 1	Polyvinylidene fluoride (PVDF)	Bend radius	0 Millimetre
Material quality connection 1	Polyvinylidene fluoride (PVDF) (expired)	Outer pipe diameter connection 1	26 Millimetre
Surface protection connection 1	Untreated	Wall thickness, connection 1	1 Millimetre
Surface treatment connection 1	Untreated	Outer pipe diameter connection 2	26 Millimetre
Material connection 2	Polyvinylidene fluoride (PVDF)	Wall thickness, connection 2	1 Millimetre
Material quality connection 2	Polyvinylidene fluoride (PVDF) (expired)	Zeta value	0,5
Surface protection connection 2	Untreated	Length	80 Millimetre
Surface treatment connection 2	Untreated	Length of connection 1	40 Millimetre
Shape	Straight	Working length connection 1	13 Millimetre
Reducing	No	Length of connection 2	40 Millimetre
Eccentric	No	Working length connection 2	13,5 Millimetre
System-specific	Yes	Min. medium temperature (continuous)	-10 Degrees celsius
Nominal diameter connection 1	DN 15	Wrench width union nut	0 Millimetre
Connection 1	Press sleeve	Max. medium temperature (continuous)	70 Degrees celsius
Contour code connection 1	TH	Max. operating pressure at 20 °C	16 Pressure
Nominal diameter connection 2	DN 15	Standard Dimension Ratio (SDR)	0
Connection 2	Press sleeve		
Contour code connection 2	TH		
Contour code	TH		
Material sealing	Ethylene-propylene diene monomer rubber (EPDM)		
Main colour fitting	White		
Self-sealing	No		
Ring stiffness class	Other		
With sealing rings/gaskets	Yes		
With buffer stud	No		
Gastec QA	No		
Capped	No		
With drain	No		
KIWA certified	No		
With de-aerator	No		
FM quality mark	No		
LPCB quality mark	No		
ULC quality mark	No		
VdS quality mark	No		
UL quality mark	No		

Produits liés

15PKW-3232: Manchon Blanc 32x32

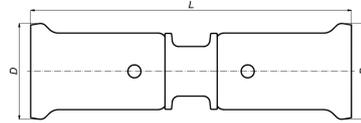

Informations commerciales

PVDF press fittings in combination with multilayer pipe, a completely corrosion-free system. The synthetic press fittings are made from injection moulded PVDF (Polyvinylidene fluoride)*. PVDF offers the user a unique combination of properties:

- Highly resistant to pressure and temperature
- Excellent mechanical strength
- Extreme flexibility: bending up to 10° is possible
- Perfectly suited for drinking water and food
- Highly resistant to chemicals and corrosion
- Embedding is possible without extra protection

Certificats

STF, QB (CSTBat), SINTEF, ATG, ETA, AFNOR, ACS, RISE, DVGW Wasser, Aenor, Sans 21003

Applications

drinkwater, verwarming, perslucht, koeling, demi water

Solutions

gebouwinstallaties, industrie

Caractéristiques techniques

Material connection 1	Polyvinylidene fluoride (PVDF)	Bend radius	0 Millimetre
Material quality connection 1	Polyvinylidene fluoride (PVDF) (expired)	Outer pipe diameter connection 1	32 Millimetre
Surface protection connection 1	Untreated	Wall thickness, connection 1	0,9 Millimetre
Surface treatment connection 1	Untreated	Outer pipe diameter connection 2	32 Millimetre
Material connection 2	Polyvinylidene fluoride (PVDF)	Wall thickness, connection 2	0,9 Millimetre
Material quality connection 2	Polyvinylidene fluoride (PVDF) (expired)	Zeta value	0,5
Surface protection connection 2	Untreated	Length	102 Millimetre
Surface treatment connection 2	Untreated	Length of connection 1	51 Millimetre
Shape	Straight	Working length connection 1	15 Millimetre
Reducing	No	Length of connection 2	51 Millimetre
Eccentric	No	Working length connection 2	15,5 Millimetre
System-specific	Yes	Min. medium temperature (continuous)	-10 Degrees celsius
Nominal diameter connection 1	DN 20	Wrench width union nut	0 Millimetre
Connection 1	Press sleeve	Max. medium temperature (continuous)	70 Degrees celsius
Contour code connection 1	BE	Max. operating pressure at 20 °C	10 Pressure
Nominal diameter connection 2	DN 20	Standard Dimension Ratio (SDR)	0
Connection 2	Press sleeve		
Contour code connection 2	BE		
Contour code	BE		
Material sealing	Ethylene-propylene diene monomer rubber (EPDM)		
Main colour fitting	White		
Self-sealing	No		
Ring stiffness class	Other		
With sealing rings/gaskets	Yes		
With buffer stud	No		
Gastec QA	No		
Capped	No		
With drain	No		
KIWA certified	No		
With de-aerator	No		
FM quality mark	No		
LPCB quality mark	No		
ULC quality mark	No		
VdS quality mark	No		
UL quality mark	No		

Produits liés